


# Street Lamp

## DLDL002

### Application:


6m–12m for a variety of road lighting.

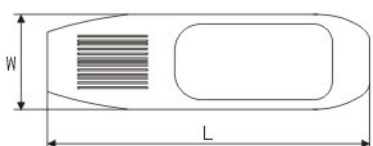

### Dimensionc: Unit(mm)

Model	L	W	H
DLDL002a	860	410	152
DLDL002b	1000	400	245

### Light distribution curve:

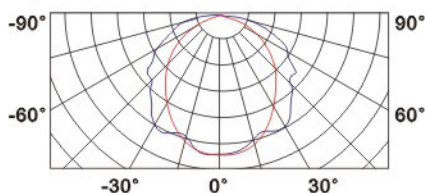

### Features:

- Simple and classic design perfectly matches to modern city.
- High-pressure die-casting aluminum lamp body, with electrostatic spray treatment surface, is corrosion resistant, impact resistant, solid and durable.
- Using high-quality heat-resistant silicone rubber gas-tight seal to ensure its sealing performance.
- High-purity tension aluminum reflector with vacuum coating surface, has softer and well-distributed light, excellent reflection.
- Transparent and tempered glass lampshade, great transmittance.
- Applied with Bemi's 40W–300W rectangular tube induction lamp to provide a efficient, long life, good color rendering and stable lighting.
- Applied with Bemi's electronic ballast particularly matching to the lamps can provide high power factor, no flash, low loss and constant power lighting.

## Technical Data

Model	Model of Lampshade	Light source	Wattage (W)	Rated Voltage (V)	Color Temperature (K)	Ambient temperature (°C)	Installation (mm)	IP Rating
DLDL002-WJ40	DLDL002a	WJY40J • RZ • W1	40	110/220/277	5000	-20~+40	Round bar Φ40~60	IP65
DLDL002-WJ60		WJY60J • RZ • W1	60					
DLDL002-WJ80		WJY80J • RZ • W1	80					
DLDL002-WJ100		WJY100J • RZ • W1	100					
DLDL002-WJ120		WJY120J • RZ • W1	120					
DLDL002-WJ150		WJY150J • RZ • W1	150					
DLDL002-WJ200	DLDL002b	WJY200J • RZ • W1	200	110/220/277	5000	-20~+40	Round bar Φ40~60	IP65
DLDL002-WJ250		WJY250J • RZ • W1	250					
DLDL002-WJ300		WJY300J • RZ • W1	300					

Remark : Listed in the table are conventional products, we can produce according to customer's requirement, such as the specific color temperature, voltage, work temperature.