


# Street Lamp

## DLDL008


### Application:

8m–12m for a variety of road lighting.

Dimension: Unit(mm)

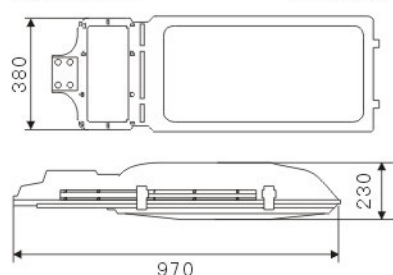

Light distribution curve:

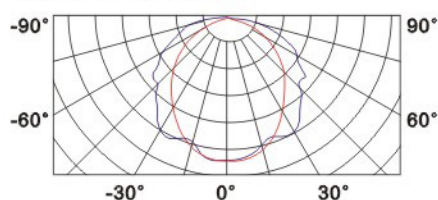

### Features:

- ⊙ High-power lamp shape, novel style and perfect appearance.
- ⊙ High-pressure die-casting aluminum lamp body, with tensile aluminum cover and the surface of the electrostatic spray treatment, is corrosion resistant, impact resistant, solid and durable.
- ⊙ High-purity tension aluminum reflector with vacuum coating surface, has excellent reflection.
- ⊙ Lampshade can use tempered glass or transparent PC material, which is high temperature resistant and has transparent curve surface.
- ⊙ Using high-quality heat-resistant silicone rubber gas-tight seal to ensure its IP performance.
- ⊙ Applied with Bemi's 40W–200W rectangular tube induction lamp to provide a efficient, long life, good color rendering and stable lighting.
- ⊙ Applied with Bemi's electronic ballast particularly matching to the lamps can provide high power factor, no flash, low loss and constant power lighting.
- ⊙ Using light-dependent control, is available for energy saving.

## Technical Data

Model	Light source	Wattage (W)	Rated Voltage (V)	Color Temperature (K)	Ambient temperature (°C)	Installation (mm)	IP Rating
DLDL008-WJ40	WJY40J · RZ · W1	40	110/220/277	5000	-20~+40	Round bar Φ40~60	IP65
DLDL008-WJ60	WJY60J · RZ · W1	60					
DLDL008-WJ80	WJY80J · RZ · W1	80					
DLDL008-WJ100	WJY100J · RZ · W1	100					
DLDL008-WJ120	WJY120J · RZ · W1	120					
DLDL008-WJ150	WJY150J · RZ · W1	150					
DLDL008-WJ200	WJY200J · RZ · W1	200					

Remark : Listed in the table are conventional products, we can produce according to customer's requirements, such as the specific color temperature, voltage, work temperature .