


Street Lamp

DLDL009


Application:

8m–15m for a variety of road lighting.

Dimension: Unit(mm)

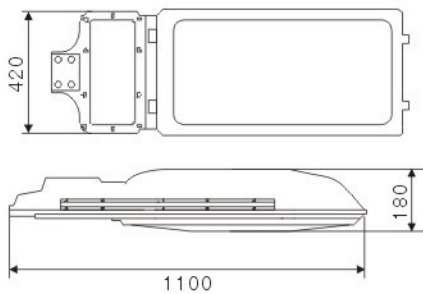

Light distribution curve:

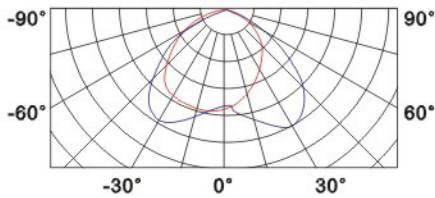

Features:

- Simple and classic design perfectly matches to modern city.
- High-pressure die-casting aluminum lamp body, with electrostatic spray surface, is anti-corrosion, strong and durable.
- Using high-quality heat-resistant silicone rubber gas-tight seal to ensure its sealing performance.
- High-purity tension aluminum reflector with vacuum coating surface, has softer and well-distributed light, excellent reflection.
- Transparent and tempered glass lampshade, great transmittance.
- Applied with Bemi's 40W–300W rectangular tube induction lamp to provide a efficient, long life, good color rendering and stable lighting.
- Applied with Bemi's electronic ballast particularly matching to the lamps can provide high power factor, no flash, low loss and constant power lighting.

Technical Data

Model	Light source	Wattage (W)	Rated Voltage (V)	Color Temperature (K)	Ambient temperature (°C)	Installation (mm)	IP Rating
DLDL009–WJ40	WJY40J • RZ • W1	40	110/220/277	5000	–20~+40	Round bar Φ40~60	IP65
DLDL009–WJ60	WJY60J • RZ • W1	60					
DLDL009–WJ80	WJY80J • RZ • W1	80					
DLDL009–WJ100	WJY100J • RZ • W1	100					
DLDL009–WJ120	WJY120J • RZ • W1	120					
DLDL009–WJ150	WJY150J • RZ • W1	150					
DLDL009–WJ200	WJY200J • RZ • W1	200					
DLDL009–WJ250	WJY250J • RZ • W1	250					
DLDL009–WJ300	WJY300J • RZ • W1	300					

Remark : Listed in the table are conventional products, we can produce according to customer's requirements, such as the specific color temperature, voltage, work temperature .