


# Ceiling Lamp

## GDX001

### Application:


Petrol stations, underground mines, underground parking, underground storage and other places lighting.

Dimensions: Unit(mm)

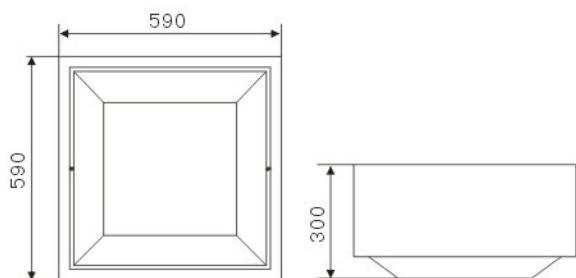

N30588

### Light distribution curve:

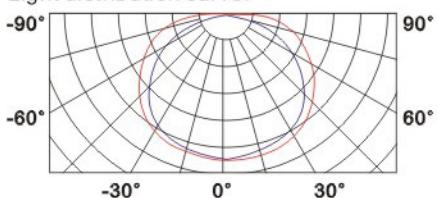

### Features:

- ◎ Metal lamp body with an electrostatic spray treated surface, is corrosion resistant and durable.
- ◎ Lamp shade is made of high temperature resistance and UV protection PC material. Beautiful, anti-aging and effectively preventing glare.
- ◎ High-quality heat-resistant and airtight silicone rubber seals and tempered glass applied, provides perfect light passing.
- ◎ Applied with Bemi's 40W~200W circular tube induction lamp to provide a efficient, long life, good color rendering and stable lighting.
- ◎ Applied with Bemi's electronic ballast particularly matching to the lamps can provide high power factor, no flash, low loss and constant power lighting.

### Technical Data

Model	Light source	Wattage (W)	Rated Voltage (V)	Color Temperature (K)	Ambient temperature (°C)	IP Rating
GDX001-WJ40	WJY40H • RZ • W1	40				
GDX001-WJ60	WJY60H • RZ • W1	60				
GDX001-WJ80	WJY80H • RZ • W1	80				
GDX001-WJ100	WJY100H • RZ • W1	100	110/220/277	5000	-20~+40	IP65
GDX001-WJ120	WJY120H • RZ • W1	120				
GDX001-WJ150	WJY150H • RZ • W1	150				
GDX001-WJ200	WJY200H • RZ • W1	200				

Remark : Listed in the table are conventional products, we can produce according to customer's requirements, such as the specific color temperature, voltage, work temperature .